

QUALITY ASSURANCE CERTIFICATE OF COMPLIANCE

(ACCORDING TO EN10204 TYPE 3.1)
ASEGURAMIENTO DE CALIDAD CERTIFICADO DE CUMPLIMIENTO

WE CERTIFY THAT THE PRODUCT LISTED BELOW WAS DESIGNED, MANUFACTURED AND TESTED ACCORDING TO OUR QUALITY SYSTEM AND REQUIREMENTS GIVEN IN ONE OR MORE OF THE FOLLOWING STANDARDS LAST EDITION:

(CERTIFICAMOS QUE EL PRODUCTO LISTADO ABAJO FUE DISEÑADO, FABRICADO Y PRABADO DE ACUERDO CON NUESTRO SISTEMA DE CALIDAD Y CON REQUISITOS ESTABLECIDOS EN UNO O MAS DE LOS SIGUIENTES ESTANDARES ULTIMA EDICIÓN.)

- API 598
- API 599
- ANSI B16-10
- ANSI B16-34
- MSS-SP61
- VALVE INSPECTION AND TESTING
- METAL PLUG VALVES - FLANGED, THREADED AND WELDING
- FACE TO FACE AND END TO END DIMENSIONS OF VALVES
- VALVES - FLANGED, THREADED AND WELDING ENDS
- PRESSURE TESTING OF STEEL VALVES

- PIPELINE VALVES - GATE, PLUG, BALL AND CHECK
- STEEL GATE VALVES, FLANGED AND WELDING ENDS
- FORGED FITTINGS, SOCKET - WELDING AND THREADED
- COMPACT STEEL GATE VALVES - FLANGED, THREADED, WELDING AND EXTENDED - BODY ENDS

Part No. AC041A08MAB830000K
(Código)
4" Fig. 5202 F UT WCB, API TRIM No.8 830000K
Descripción

CAST STEEL GATE VALVE 150 PSI
(VALVULA COMPUERTA DE ACERO FUNDIDO 150 PSI)

VALVE WITH LOW EMISSION CONTROL (VALVULA SUMINISTRADA CON CONTROL DE EMISIONES FUGITIVAS A 50 PPM'S MAX)


PRESSURE TEST (PRUEBAS DE PRESION)	SHELL (CASCO)	BACK (SEAT)	SIDE (LADO)	
			1	2
HYDROSTATIC (PSI) (HIDROSTATICA)	450	450	N A	N A
PNEUMATIC (PSI) (NEUMATICA)			80	80

MECHANICAL TESTS (PROP. MECANICAS)

TENS	YIELD	ELG	RED	BHN
74.39	43.65	26	46	154
77.57	49.59	33	55	149
98.02	70.76	25	47	275

CHEMICAL COMPOSITION (%)

ITEM (PARTE)	HEAT No. (COLADA)	MATERIAL (ASTM)	COMPOSICIÓN QUIMICA (%)											
			C	Mn	P	S	Si	Ni	Cr	Mo	Cu	V	Ce	
BONNET BONETE	WH27785	ASTM A-216/WCB	0.210	0.950	0.021	0.018	0.483	0.007	0.031	0.024	0.019	0.005		
BODY CUERPO	WH24097	ASTM A-216/WCB	Normalized to (Normalized a) 930 °C	0.963	0.029	0.015	0.495	0.005	0.005	0.013	0.024	0.001	Cooled in air. (Enfri	
WEDGE DISCO	D4852	ASTM A-217/CA15	Normalized to (Normalized a) 920 °C	0.820	0.016	0.032	0.960	0.640	12.590	0.024	0.018	0.002	Cooled in air. (Enfri	
			Normalizado a (Normalized to) 970 °C				Temple a (Temper to) 630 °C						Enfriado en aire. (Enfriado en aire. (C)	

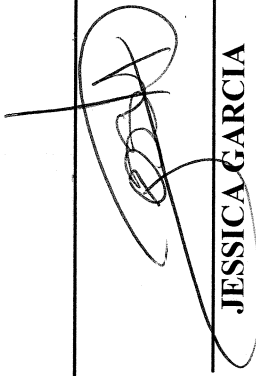

JESSICA GARCIA