

# QUALITY ASSURANCE CERTIFICATE OF COMPLIANCE

 (ACCORDING TO EN10204 TYPE 3.1)  
**ASEGURAMIENTO DE CALIDAD CERTIFICADO DE CUMPLIMIENTO**

WE CERTIFY THAT THE PRODUCT LISTED BELOW WAS DESIGNED, MANUFACTURED AND TESTED ACCORDING TO OUR QUALITY SYSTEM AND REQUIREMENTS GIVEN IN ONE OR MORE OF THE FOLLOWING STANDARDS LAST EDITION:

(CERTIFICAMOS QUE EL PRODUCTO LISTADO ABAJO FUE DISEÑADO, FABRICADO Y PRABADO DE ACUERDO CON NUESTRO SISTEMA DE CALIDAD Y CON REQUISITOS ESTABLECIDOS EN UNO O MAS DE LOS SIGUIENTES ESTANDARES ULTIMA EDICIÓN.)

API 598	- VALVE INSPECTION AND TESTING	API 6D	- PIPELINE VALVES - GATE, PLUG, BALL AND CHECK
API 599	- METAL PLUG VALVES - FLANGED, THREADED AND WELDING	API 600	- STEEL GATE VALVES, FLANGED AND WELDING ENDS
ANSI B16-10	- FACE TO FACE AND END TO END DIMENSIONS OF VALVES	ANSI B16-11	- FORGED FITTINGS, SOCKET - WELDING AND THREADED
ANSI B16-34	- VALVES - FLANGED, THREADED AND WELDING ENDS	API 602	- COMPACT STEEL GATE VALVES - FLANGED, THREADED, WELDING AND EXTENDED - BODY ENDS
MSS-SP61	- PRESSURE TESTING OF STEEL VALVES		


**Part No. AR031A08MAB830000G**  
 (Código) **3" Fig. 5341 F UT WCB, API TRIM No.8 830000G**  
**Description** **CAST STEEL SWING CHECK VALVE 150 CLASS**  
 Descripción **(VALVULA RETENCIÓN TIPO COLUMPIO DE ACERO FUNDIDO 150 CLASS)**

VALVE WITH LOW EMISSION CONTROL (VALVULA SUMINISTRADA CON CONTROL DE EMISIONES FUGITIVAS A 50 PPM'S MAX )

PRESSURE TEST (PRUEBAS DE PRESTON)	SHELL (CASCO)	BACK (SEAT)	SIDE (LADO)	
			1	2
HYDROSTATIC (PSI) (HIDROSTATICA)	450	N A	315	N A
PNEUMATIC (PSI) (NEUMATICA)			N A	N A

**MECHANICAL TESTS (PROP. MECANICAS)**
**CHEMICAL COMPOSITION (%)**
**COMPOSICIÓN QUIMICA (%)**
**TENS YIELD ELG RED BHN**

ITEM (PARTE)	HEAT No. (COLADA)	MATERIAL (ASTM)	C	Mn	P	S	Si	Ni	Cr	Mo	Cu	V	Cb	KPSI	KPSI	%	%	AVG
														CVN@	1ST	2ND	3RD	
<b>BODY</b> CUERPO	12820	ASTM A-216/WCB	0.160	0.680	0.020	0.019	0.450	0.050	0.060	0.070	0.060	0.010		76.56	40.31	33	45	162
			Normalized to (Normalizado a) 920 °C				Temper to (Temple a) 650 °C				Cooled in air.(Cooled in air. (Enfr)							
<b>COVER</b> TAPA	12819	ASTM A-216/WCB	0.170	0.750	0.018	0.021	0.420	0.070	0.080	0.060	0.070	0.010		76.70	40.31	28	35	160
			Normalized to (Normalizado a) 920 °C				Temper to (Temple a) 650 °C				Cooled in air.(Cooled in air. (Enfr)							
<b>WEDGE</b> DISCO	12813	ASTM A-216/WCB	0.230	0.750	0.021	0.020	0.390	0.060	0.070	0.040	0.050	0.010		76.99	40.74	32	41	156
			Normalized to (Normalizado a) 920 °C								Cooled in air.(Cooled in air. (Enfr)							

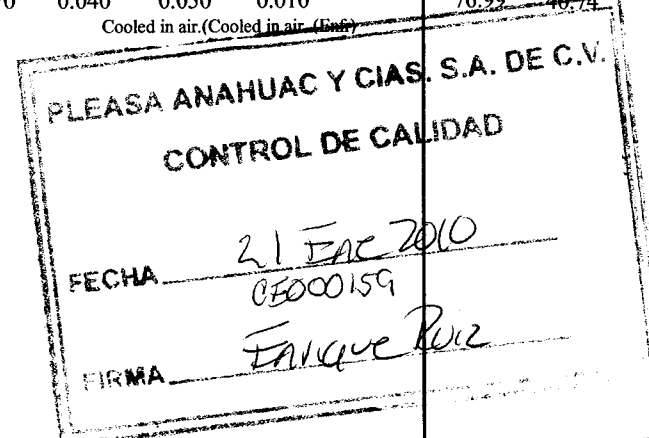

FAC10-21 REV "3"