

## QUALITY ASSURANCE CERTIFICATE OF COMPLIANCE

(ACCORDING TO EN10204 TYPE 3.1)  
**ASEGURAMIENTO DE CALIDAD CERTIFICADO DE CUMPLIMIENTO**

WE CERTIFY THAT THE PRODUCT LISTED BELOW WAS DESIGNED, MANUFACTURED AND TESTED ACCORDING TO OUR QUALITY SYSTEM AND REQUIREMENTS GIVEN IN ONE OR MORE OF THE FOLLOWING STANDARDS LAST EDITION:

(CERTIFICAMOS QUE EL PRODUCTO LISTADO ABAJO FUE DISEÑADO, FABRICADO Y PRABADO DE ACUERDO CON NUESTRO SISTEMA DE CALIDAD Y CON REQUISITOS ESTABLECIDOS EN UNO O MAS DE LOS SIGUIENTES ESTANDARES ULTIMA EDICIÓN.)

- |  |   |
|--|---|
| API 598 - VALVE INSPECTION AND TESTING                         | API 6D - PIPELINE VALVES - GATE, PLUG, BALL AND CHECK                                     |
| API 599 - METAL PLUG VALVES - FLANGED, THREADED AND WELDING    | API 600 - STEEL GATE VALVES, FLANGED AND WELDING ENDS                                     |
| ANSI B16-10 - FACE TO FACE AND END TO END DIMENSIONS OF VALVES | ANSI B16-11 - FORGED FITTINGS, SOCKET - WELDING AND THREADED                              |
| ANSI B16-34 - VALVES - FLANGED, THREADED AND WELDING ENDS      | API 602 - COMPACT STEEL GATE VALVES - FLANGED, THREADED, WELDING AND EXTENDED - BODY ENDS |
| MSS-SP61 - PRESSURE TESTING OF STEEL VALVES                    |   |

**Part No. AG041A08MAB830000G**  
 (Código) **4" Fig. 5275 F UT WCB, API TRIM No.8 830000**  
**Description**

**Descripción** **CAST STEEL GLOBE VALVE 150 CLASS**  
**(VALVULA GLOBO DE ACERO FUNDIDO CLASE 150)**

VALVE WITH LOW EMISSION CONTROL (50 PPM'S MAX.) (VALVULA SUMINISTRADA CON CONTROL DE BAJAS EMISIONES FUGITIVAS (50 PPM'S MAX.))

PRESSURE TEST (PRUEBAS DE PRESION)	SHELL (CASCO)	BACK (SEAT)	SIDE (LADO)	
			1	2
HYDROSTATIC (PSD) (HIDROSTATICA)	450	450	315	N A
PNEUMATIC (PSD) (NEUMATICA)			80	N A

**MECHANICAL TESTS (PROP. MECANICAS)**

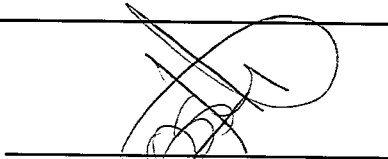
**CHEMICAL COMPOSITION (%)**

COMPOSICIÓN QUIMICA (%)

ITEM (PARTE)	HEAT No. (COLADA)	MATERIAL (ASTM)	C	Mn	P	S	Si	Ni	Cr	Mo	Cu	V	Cb	TENS	YIELD	ELG	RED	BHN
														KPSI CVN@	KPSI 1ST	% 2ND	% 3RD	AVG
BODY	H2541	ASTM A-216/WCB	0.216	0.900	0.035	0.022	0.441	0.036	0.041	0.009	0.054	0.001		84.54	44.23	45	53	156
CUERPO			Normalized (Normalizado a) 920 °C															
BONNET	H2542	ASTM A-216/WCB	0.201	0.923	0.026	0.021	0.390	0.031	0.045	0.009	0.054	0.001		72.36	44.81	42	43	165
BONETE			Normalized (Normalizado a) 910 °C															
WEDGE	H2737	ASTM A-216/WCB	0.184	0.967	0.020	0.025	0.436	0.042	0.036	0.013	0.063	0.001		75.11	43.94	33	48	166
DISCO			Normalized (Normalizado a) 910 °C															
			Temper to (Temple a) 650 °C															
			Air Cooled. (Enfriado en aire.)															

 CERTIFICADO POR:  
 ASEGURAMIENTO DE CALIDAD

 CERTIFIED BY:  
 QUALITY ASSURANCE

  
 Jessica Garcia