

## QUALITY ASSURANCE CERTIFICATE OF COMPLIANCE

(ACCORDING TO EN10204 TYPE 3.1)

### ASEGURAMIENTO DE CALIDAD CERTIFICADO DE CUMPLIMIENTO

WE CERTIFY THAT THE PRODUCT LISTED BELOW WAS DESIGNED, MANUFACTURED AND TESTED ACCORDING TO OUR QUALITY SYSTEM AND REQUIREMENTS GIVEN IN ONE OR MORE OF THE FOLLOWING STANDARDS LAST EDITION:

(CERTIFICAMOS QUE EL PRODUCTO LISTADO ABAJO FUE DISEÑADO, FABRICADO Y PROBADO DE ACUERDO CON NUESTRO SISTEMA DE CALIDAD Y CON REQUISITOS ESTABLECIDOS EN UNO O MAS DE LOS SIGUIENTES ESTANDARES ULTIMA EDICIÓN.)

API 598 - VALVE INSPECTION AND TESTING  
 API 599 - METAL PLUG VALVES - FLANGED, THREADED AND WELDING  
 ANSI B16-10 - FACE TO FACE AND END TO END DIMENSIONS OF VALVES  
 ANSI B16-34 - VALVES - FLANGED, THREADED AND WELDING ENDS  
 MSS-SP61 - PRESSURE TESTING OF STEEL VALVES

API 6D - PIPELINE VALVES - GATE, PLUG, BALL AND CHECK  
 API 600 - STEEL GATE VALVES, FLANGED AND WELDING ENDS  
 ANSI B16-11 - FORGED FITTINGS, SOCKET - WELDING AND THREADED  
 API 602 - COMPACT STEEL GATE VALVES - FLANGED, THREADED, WELDING AND EXTENDED - BODY ENDS

**Part No.** AC061A08MAB830000M  
 (Código)  
**Description** 6" Fig. 5202 F UT WCB, API TRIM No.8 830000M  
 Descripción CAST STEEL GATE VALVE 150 CLASS  
 (VALVULA COMPUERTA DE ACERO FUNDIDO CLASE 150)

VALVE WITH LOW EMISSION CONTROL (50 PPM'S MAX.) (VALVULA SUMINISTRADA CON CONTROL DE BAJAS EMISIONES FUGITIVAS (50 PPM'S MAX.))

PRESSURE TEST (PRUEBAS DE PRESION)	SHELL (CASCO)	BACK (SEAT)	SIDE (LADO)	
			1	2
HYDROSTATIC (PSI) (HIDROSTATICA)	450	450	N A	N A
PNEUMATIC (PSI) (NEUMATICA)			80	80


#### MECHANICAL TESTS (PROP. MECANICAS)

CHEMICAL COMPOSITION (%)			COMPOSICIÓN QUIMICA (%)										TENS	YIELD	ELG	RED	BHN		
ITEM (PARTE)	HEAT No. (COLADA)	MATERIAL (ASTM)	C	Mn	P	S	Si	Ni	Cr	Mo	Cu	V	Cb	KPSI CVN@	KPSI 1ST	% 2ND	% 3RD	AVG	
BODY CUERPO	WH33411	ASTM A-216/WCB	0.212	0.947	0.030	0.021	0.391	0.036	0.049	0.006	0.044	0.001		75.26	45.53	28	49	169	
BONNET BONETE	WH33131	ASTM A-216/WCB	Normalizated to (Normalizado a) 930				Temper to (Temple a) 650				Enfriado en aire.								
			0.198	0.920	0.025	0.012	0.438	0.034	0.051	0.003	0.027	0.001		77.43	48.72	25	44	159	
WEDGE DISCO	WH33639	ASTM A-216/WCB	Normalizated to (Normalizado a) 930				Temper to (Temple a) 650				Enfriado en aire.								
			0.187	0.908	0.028	0.014	0.395	0.045	0.065	0.006	0.027	0.001		75.11	45.24	26	48	171	
			Normalizated to (Normalizado a) 930				Temper to (Temple a) 650				Enfriado en aire.								

FAC10-21 REV "3"

CERTIFICADO POR:  
ASEGURAMIENTO DE CALIDAD

CERTIFIED BY:  
QUALITY ASSURANCE

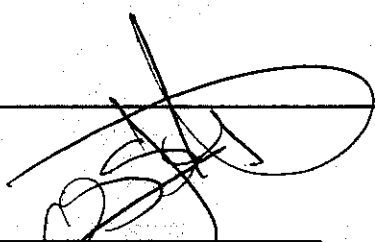

Jessica Garcia