

## QUALITY ASSURANCE CERTIFICATE OF COMPLIANCE

(ACCORDING TO EN10204 TYPE 3.1)

**ASEGURAMIENTO DE CALIDAD CERTIFICADO DE CUMPLIMIENTO**

WE CERTIFY THAT THE PRODUCT LISTED BELOW WAS DESIGNED, MANUFACTURED AND TESTED ACCORDING TO OUR QUALITY SYSTEM AND REQUIREMENTS GIVEN IN ONE OR MORE OF THE FOLLOWING STANDARDS LAST EDITION:

(CERTIFICAMOS QUE EL PRODUCTO LISTADO ABAJO FUE DISEÑADO, FABRICADO Y PROBADO DE ACUERDO CON NUESTRO SISTEMA DE CALIDAD Y CON REQUISITOS ESTABLECIDOS EN UNO O MAS DE LOS SIGUIENTES ESTANDARES ULTIMA EDICIÓN.)

- |             |   |             |   |
|-------------|---|-------------|---|
| API 598     | - VALVE INSPECTION AND TESTING                      | API 6D      | - PIPELINE VALVES - GATE, PLUG, BALL AND CHECK                                    |
| API 599     | - METAL PLUG VALVES - FLANGED, THREADED AND WELDING | API 600     | - STEEL GATE VALVES, FLANGED AND WELDING ENDS                                     |
| ANSI B16-10 | - FACE TO FACE AND END TO END DIMENSIONS OF VALVES  | ANSI B16-11 | - FORGED FITTINGS, SOCKET - WELDING AND THREADED                                  |
| ANSI B16-34 | - VALVES - FLANGED, THREADED AND WELDING ENDS       | API 602     | - COMPACT STEEL GATE VALVES - FLANGED, THREADED, WELDING AND EXTENDED - BODY ENDS |
| MSS-SP61    | - PRESSURE TESTING OF STEEL VALVES                  |             |   |

**Part No. AC061A08MAB830000F**

(Código)

**Description 6" Fig. 5202 F UT WCB, API TRIM No.8 830000**

Descripción

**CAST STEEL GATE VALVE 150 CLASS  
(VALVULA COMPUERTA DE ACERO FUNDIDO CLASE 150)**

VALVE WITH LOW EMISSION CONTROL (50 PPM'S MAX.) (VALVULA SUMINISTRADA CON CONTROL DE BAJAS EMISIONES FUGITIVAS (50 PPM'S MAX.))

PRESSURE TEST (PRUEBAS DE PRESION)	SHELL (CASCO)	BACK (SEAT)	SIDE (LADO)	
			1	2
HYDROSTATIC (PSI) (HIDROSTATICA)	450	450	N A	N A
PNEUMATIC (PSI) (NEUMATICA)			80	80

**MECHANICAL TESTS (PROP. MECANICAS)**

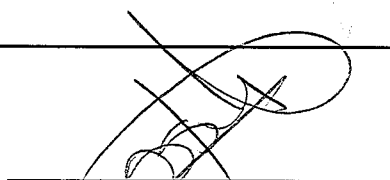
**CHEMICAL COMPOSITION (%)**

COMPOSICIÓN QUIMICA (%)

ITEM (PARTE)	HEAT No. (COLADA)	MATERIAL (ASTM)	CHEMICAL COMPOSITION (%)										MECHANICAL TESTS (PROP. MECANICAS)							
			C	Mn	P	S	Si	Ni	Cr	Mo	Cu	V	Cb	TENS KPSI CVN@	YIELD KFSI 1ST	ELG % 2ND	RED % 3RD	BHN AVG		
BODY CUERPO	Z0369	ASTM A-216/WCB	0.234	0.894	0.028	0.025	0.515	0.017	0.019	0.013	0.012	0.001								
BONNET BONETE	Z0367	ASTM A-216/WCB	Normalized (Normalizado a) 930 °C Temper to (Temple a) 650 °C Air Cooled. (Enfriado en aire.)										71.20	39.44	28	37	158			
WEDGE DISCO	350	ASTM A-216/WCB	Normalized (Normalizado a) 930 °C Temper to (Temple a) 650 °C Air Cooled. (Enfriado en aire.)										71.78	38.72	28	40	160			
			0.200	0.870	0.027	0.019	0.440	0.020	0.060	0.010	0.030	0.000								

CERTIFICADO POR:  
ASEGURAMIENTO DE CALIDAD

CERTIFIED BY:  
QUALITY ASSURANCE

  
Jessica Garcia